


Electrically insulated bearing

Seal d 35-150
mm-

6013-2RS/C3V3031A6013-2Z/C3V3031A6013-2RS1/C3VL02416013-2RS1/C3VL20716013-2RS1/C3VL02466013-2RS1/C3VL20766013-2RSR-J20AA-C36013-2RSR-J20AB-C36013-2RSR-J20A-C36013-2RSR-J20B-C36013-2RSR-J20C-C3

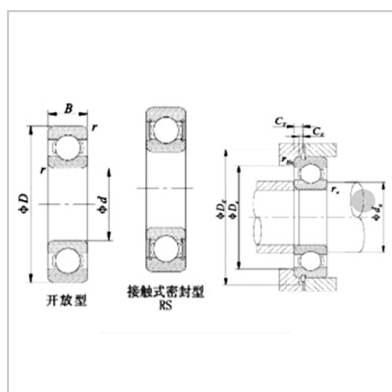

Boundary dimensions(mm) :

d :	65
D :	100
B :	18
r min :	1.1

Basic rated load(KN) :

Cr :	29.20
Cor :	23.50

Limiting Speed (r/min) :

Grease :	6500
Oil :	7700

Nominal mode :

The rubber cover seals the outer ring insulated :	6013-2RS/C3V3031A
The rubber cover seals the inner ring insulated :	-
Iron cover seal outer ring insulation :	6013-2Z/C3V3031A
Iron cover seal inner ring insulation :	-

Installation related dimensions (mm) :

do min :	71.5
Do max :	93.5
ro max :	1
Insulation Performance (VDC) :	>1000
Approx Weight (kg) :	0.421

SKF :

--	--

Approx 1 :	6013-2RS1/C3VL0241
------------	--------------------

Approx 2 :	6013-2RS1/C3VL2071
------------	--------------------

Approx 3 :	6013-2RS1/C3VL0246
------------	--------------------

Approx 4 :	6013-2RS1/C3VL2076
------------	--------------------

FAG :

Approx 1 :	6013-2RSR-J20AA-C3
------------	--------------------

Approx 2 :	6013-2RSR-J20AB-C3
------------	--------------------

Approx 3 :	6013-2RSR-J20A-C3
------------	-------------------

Approx 4 :	6013-2RSR-J20B-C3
------------	-------------------

Approx 5 :	6013-2RSR-J20C-C3
------------	-------------------

: