


Electrically insulated bearing

Seal d 35-150
mm-

6209-2RS/C3V3031A6209-2Z/C3V3031A6209-2RS1/C3VL02416209-2RS1/C3VL20716209-2RS1/C3VL024662
09-2RS1/C3VL20766209-2RSR-J20AA-C36209-2RSR-J20AB-C36209-2RSR-J20A-C36209-2RSR-J20B-
C36209-2RSR-J20C-C3

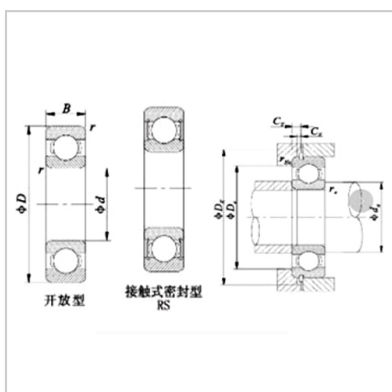

Boundary dimensions(mm) :

d :	45
D :	85
B :	19
r min :	1.1

Basic rated load(KN) :

Cr :	31.20
Cor :	20.30

Limiting Speed (r/min) :

Grease :	7800
Oil :	9200

Nominal mode :

The rubber cover seals the outer ring insulated :	6209-2RS/C3V3031A
The rubber cover seals the inner ring insulated :	-
Iron cover seal outer ring insulation :	6209-2Z/C3V3031A
Iron cover seal inner ring insulation :	-

Installation related dimensions (mm) :

do min :	51.5
Do max :	78.5
ro max :	1
Insulation Performance (VDC) :	>1000
Approx Weight (kg) :	0.398

SKF :

--	--

Approx 1 : 6209-2RS1/C3VL0241

Approx 2 : 6209-2RS1/C3VL2071

Approx 3 : 6209-2RS1/C3VL0246

Approx 4 : 6209-2RS1/C3VL2076

FAG :

Approx 1 : 6209-2RSR-J20AA-C3

Approx 2 : 6209-2RSR-J20AB-C3

Approx 3 : 6209-2RSR-J20A-C3

Approx 4 : 6209-2RSR-J20B-C3

Approx 5 : 6209-2RSR-J20C-C3

: