


Electrically insulated bearing

Seal d 35-150
mm-

6211-2RS/C3V3031A6211-2Z/C3V3031A6211-2RS1/C3VL02416211-2RS1/C3VL20716211-2RS1/C3VL02466211-2RS1/C3VL20766211-2RSR-J20AA-C36211-2RSR-J20AB-C36211-2RSR-J20A-C36211-2RSR-J20B-C36211-2RSR-J20C-C3

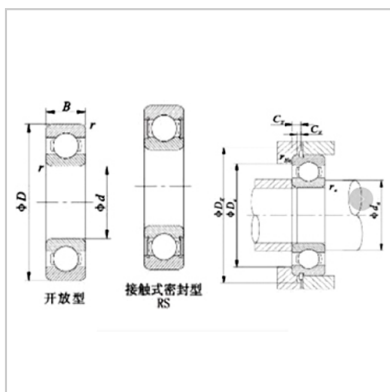

Boundary dimensions(mm) :

d :	55
D :	100
B :	21
r min :	1.5

Basic rated load(KN) :

Cr :	43.40
Cor :	29.20

Limiting Speed (r/min) :

Grease :	6400
Oil :	7600

Nominal mode :

The rubber cover seals the outer ring insulated :	6211-2RS/C3V3031A
The rubber cover seals the inner ring insulated :	-
Iron cover seal outer ring insulation :	6211-2Z/C3V3031A
Iron cover seal inner ring insulation :	-

Installation related dimensions (mm) :

do min :	63
Do max :	92
ro max :	1.5
Insulation Performance (VDC) :	>1000
Approx Weight (kg) :	0.601

SKF :

Approx 1 : 6211-2RS1/C3VL0241

Approx 2 : 6211-2RS1/C3VL2071

Approx 3 : 6211-2RS1/C3VL0246

Approx 4 : 6211-2RS1/C3VL2076

FAG :

Approx 1 : 6211-2RSR-J20AA-C3

Approx 2 : 6211-2RSR-J20AB-C3

Approx 3 : 6211-2RSR-J20A-C3

Approx 4 : 6211-2RSR-J20B-C3

Approx 5 : 6211-2RSR-J20C-C3

: