


Electrically insulated bearing

Seal d 35-150
mm-

6311-2RS/C3V3031A6311-2RS/C3V3031B6311-2Z/C3V3031A6311-2Z/C3V3031B6311-2RS1/C3VL02416311-2RS1/C3VL20716311-2RS1/C3VL02466311-2RS1/C3VL20766311-2RSR-J20AA-C36311-2RSR-J20AB-C36311-2RSR-J20A-C36311-2RSR-J20B-C36311-2RSR-J20C-C3

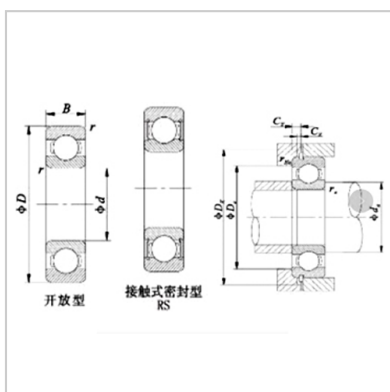

Boundary dimensions(mm) :

d :	55
D :	120
B :	29
r min :	2

Basic rated load(KN) :

Cr :	71.50
Cor :	44.60

Limiting Speed (r/min) :

Grease :	5800
Oil :	6800

Nominal mode :

The rubber cover seals the outer ring insulated :	6311-2RS/C3V3031A
The rubber cover seals the inner ring insulated :	6311-2RS/C3V3031B
Iron cover seal outer ring insulation :	6311-2Z/C3V3031A
Iron cover seal inner ring insulation :	6311-2Z/C3V3031B

Installation related dimensions (mm) :

do min :	64
Do max :	111
ro max :	2
Insulation Performance (VDC) :	>1000
Approx Weight (kg) :	1.370

SKF :

Approx 1 : 6311-2RS1/C3VL0241

Approx 2 : 6311-2RS1/C3VL2071

Approx 3 : 6311-2RS1/C3VL0246

Approx 4 : 6311-2RS1/C3VL2076

FAG :

Approx 1 : 6311-2RSR-J20AA-C3

Approx 2 : 6311-2RSR-J20AB-C3

Approx 3 : 6311-2RSR-J20A-C3

Approx 4 : 6311-2RSR-J20B-C3

Approx 5 : 6311-2RSR-J20C-C3

: