


Electrically insulated bearing

Seal d 35-150
mm-

6012-2RS/C3V3031A6012-2Z/C3V3031A6012-2RS1/C3VL02416012-2RS1/C3VL20716012-2RS1/C3VL02466012-2RS1/C3VL20766012-2RSR-J20AA-C36012-2RSR-J20AB-C36012-2RSR-J20A-C36012-2RSR-J20B-C36012-2RSR-J20C-C3

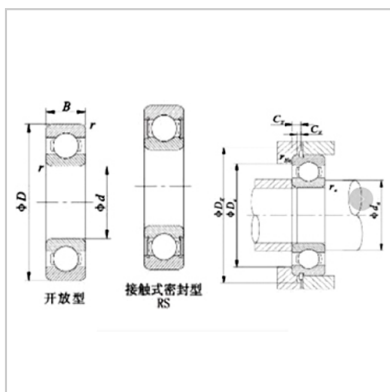

Boundary dimensions(mm) :

d :	60
D :	95
B :	18
r min :	1.1

Basic rated load(KN) :

Cr :	30.70
Cor :	22.70

Limiting Speed (r/min) :

Grease :	7000
Oil :	8300

Nominal mode :

The rubber cover seals the outer ring insulated :	6012-2RS/C3V3031A
The rubber cover seals the inner ring insulated :	-
Iron cover seal outer ring insulation :	6012-2Z/C3V3031A
Iron cover seal inner ring insulation :	-

Installation related dimensions (mm) :

do min :	66.5
Do max :	88.5
ro max :	1
Insulation Performance (VDC) :	>1000
Approx Weight (kg) :	0.414

SKF :

Approx 1 : 6012-2RS1/C3VL0241

Approx 2 : 6012-2RS1/C3VL2071

Approx 3 : 6012-2RS1/C3VL0246

Approx 4 : 6012-2RS1/C3VL2076

FAG :

Approx 1 : 6012-2RSR-J20AA-C3

Approx 2 : 6012-2RSR-J20AB-C3

Approx 3 : 6012-2RSR-J20A-C3

Approx 4 : 6012-2RSR-J20B-C3

Approx 5 : 6012-2RSR-J20C-C3

: