


Electrically insulated bearing

d 35-400 mm-F-803478/V3031AF-803478/V3031BF-803478/V3031BF-803478/V3031A

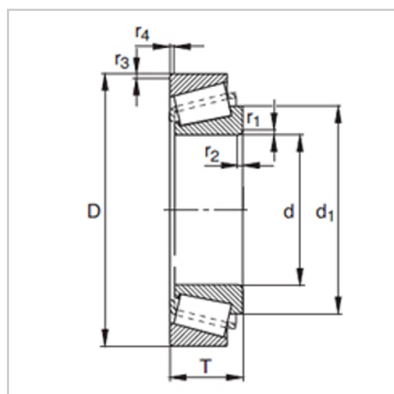

Boundary dimensions(mm) :

d :	117.475
D :	212.725
T :	63.5
r1、 2 (min) :	8.1
r3、 4 (min) :	3.3

Basic rated load(KN) :

Cr :	490
Cor :	720
Limiting Speed (r/min) :	3000
Nominal type (copper sheath insulation) :	F-803478/V3031A
Nominal type (copper sheath insulation) :	F-803478/V3031B
Approx Weight (kg) :	9.4
Insulation Performance (VDC) :	>1000

SKF reference code :

Approx 1 :	F-803478 VL0241
Approx 2 :	F-803478 VL2071
Approx 3 :	F-803478 VL2046
Approx 4 :	F-803478 VL2076

FAG reference code :

Approx 1 :	F-803478-J20AA
Approx 2 :	F-803478-J20AB
Approx 3 :	F-803478-J20A
Approx 4 :	F-803478-J20B
Approx 5 :	F-803478-J20C