


Electrically insulated bearing

d 35-400

mm-F-803889.32224/V3031AF-803889.32224/V3031BF-803889.32224/V3031BF-803889.32224/V3031A

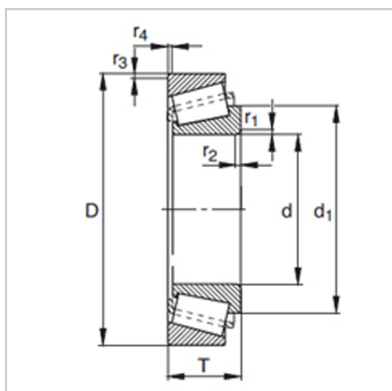

Boundary dimensions(mm) :

d :	120
D :	215
T :	61.5
r1、 2 (min) :	3
r3、 4 (min) :	2.5

Basic rated load(KN) :

Cr :	445
Cor :	650
Limiting Speed (r/min) :	3000
Nominal type (copper sheath insulation) :	F-803889.32224/V3031A
Nominal type (copper sheath insulation) :	F-803889.32224/V3031B
Approx Weight (kg) :	9.15
Insulation Performance (VDC) :	>1000

SKF reference code :

Approx 1 :	F-803889.32224 VL0241
Approx 2 :	F-803889.32224 VL2071
Approx 3 :	F-803889.32224 VL2046
Approx 4 :	F-803889.32224 VL2076

FAG reference code :

Approx 1 :	F-803889.32224-J20AA
Approx 2 :	F-803889.32224-J20AB
Approx 3 :	F-803889.32224-J20A
Approx 4 :	F-803889.32224-J20B
Approx 5 :	F-803889.32224-J20C

