


Electrically insulated bearing

d 35-400 mm-F-804550.01/V3031AF-804550.01/V3031BF-804550.01/V3031BF-804550.01/V3031A

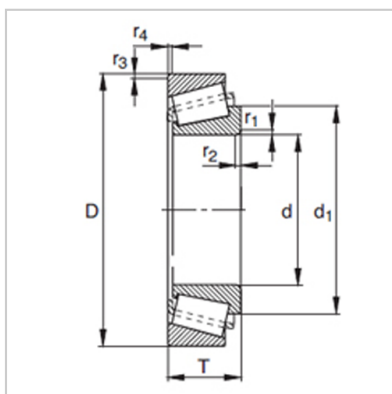

Boundary dimensions(mm) :

d :	140
D :	190
T :	99
r1、 2 (min) :	2
r3、 4 (min) :	1.5

Basic rated load(KN) :

Cr :	365
Cor :	780
Limiting Speed (r/min) :	3400
Nominal type (copper sheath insulation) :	F-804550.01/V3031A
Nominal type (copper sheath insulation) :	F-804550.01/V3031B
Approx Weight (kg) :	6.8
Insulation Performance (VDC) :	>1000

SKF reference code :

Approx 1 :	F-804550.01 VL0241
Approx 2 :	F-804550.01 VL2071
Approx 3 :	F-804550.01 VL2046
Approx 4 :	F-804550.01 VL2076

FAG reference code :

Approx 1 :	F-804550.01-J20AA
Approx 2 :	F-804550.01-J20AB
Approx 3 :	F-804550.01-J20A
Approx 4 :	F-804550.01-J20B
Approx 5 :	F-804550.01-J20C