
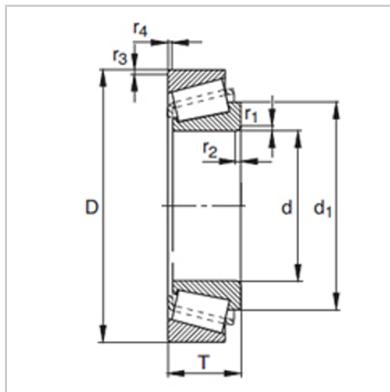


Electrically insulated bearing

d 35-400 mm-32221/V3031A32221/V3031B32221/V3031B32221/V3031A

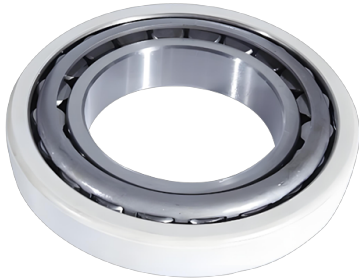

Boundary dimensions(mm) :

d :	105
D :	190
T :	53
r1、 2 (min) :	3
r3、 4 (min) :	2.5

Basic rated load(KN) :

Cr :	385
Cor :	550
Limiting Speed (r/min) :	3650
Nominal type (copper sheath insulation) :	32221/V3031A
Nominal type (copper sheath insulation) :	32221/V3031B
Approx Weight (kg) :	6.07
Insulation Performance (VDC) :	>1000

SKF reference code :

Approx 1 :	32221 VL0241
Approx 2 :	32221 VL2071
Approx 3 :	32221 VL2046
Approx 4 :	32221 VL2076

FAG reference code :

Approx 1 :	32221-J20AA
Approx 2 :	32221-J20AB
Approx 3 :	32221-J20A
Approx 4 :	32221-J20B
Approx 5 :	32221-J20C