


Electrically insulated bearing

d 35-400 mm-32222/V3031A32222/V3031B32222/V3031B32222/V3031A

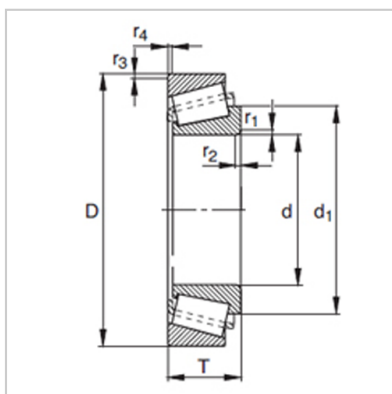

Boundary dimensions(mm) :

d :	110
D :	200
T :	56
r1、 2 (min) :	3
r3、 4 (min) :	2.5

Basic rated load(KN) :

Cr :	410
Cor :	590
Limiting Speed (r/min) :	3350
Nominal type (copper sheath insulation) :	32222/V3031A
Nominal type (copper sheath insulation) :	32222/V3031B
Approx Weight (kg) :	7.35
Insulation Performance (VDC) :	>1000

SKF reference code :

Approx 1 :	32222 VL0241
Approx 2 :	32222 VL2071
Approx 3 :	32222 VL2046
Approx 4 :	32222 VL2076

FAG reference code :

Approx 1 :	32222-J20AA
Approx 2 :	32222-J20AB
Approx 3 :	32222-J20A
Approx 4 :	32222-J20B
Approx 5 :	32222-J20C