
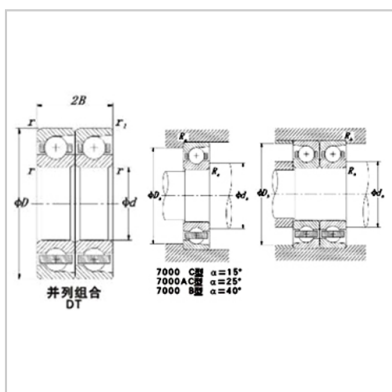
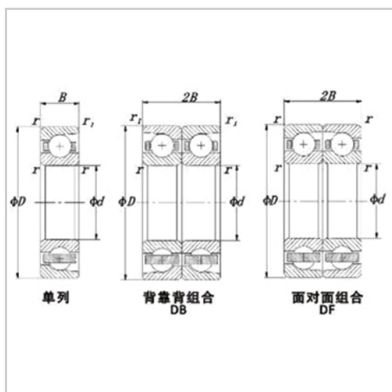


Electrically insulated bearing

d 35-400

mm-

7320BM/V3031A7320BM/V3031B7320BMVL02417320BMVL20717320BMVL02467320BMVL20767320BM-J20AA 7320BM-J20AB7320BM-J20B7320BM-J20C

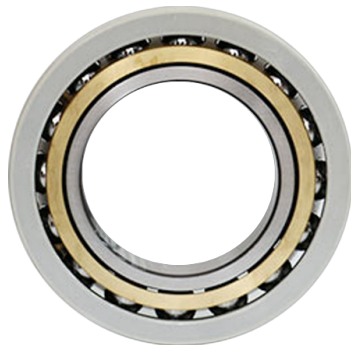

Boundary dimensions(mm) :

d :	100
D :	215
B :	47
r (Min) :	3.00
r1 (Max) :	1.10

Basic rated load(KN) :

Cr :	190.10
Cor :	177.40

Limiting Speed (r/min) :

Grease :	3000
Oil :	4000

Nominal mode :


Copper outer ring insulation :	7320BM/V3031A
Copper inner ring insulation :	7320BM/V3031B

Installation related dimensions (mm) :

da Max :	114.0
Da Max :	201.0
Ra Max :	2.5
Rb Max :	1.0
Approx Weight (kg) :	7.320
Insulation Performance (VDC) :	>1000

SKF reference code :

Approx 1 :	7320BMVL0241
Approx 2 :	7320BMVL2071
Approx 3 :	7320BMVL0246

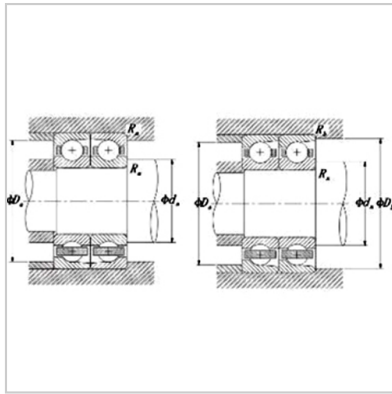

Approx 4 :

7320BMVL2076

FAG reference code :

Approx 1 :

7320BM-J20AA

Approx 2 :

7320BM-J20AB

Approx 3 :

7320BM-J20A

Approx 4 :

7320BM-J20B

Approx 5 :

7320BM-J20C

: