
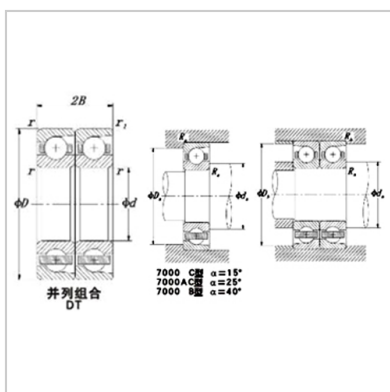
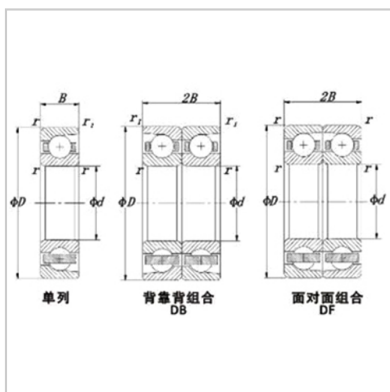


Electrically insulated bearing

d 35-400 mm-7318BM/V3031A7318BM/V3031B

7318BMVL02417318BMVL20717318BMVL02467318BMVL20767318BM-J20AA 7318BM-J20AB7318BM-J20B7318BM-J20C

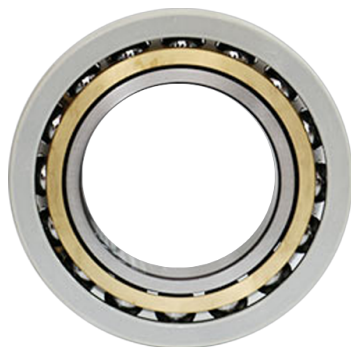

Boundary dimensions(mm) :

d :	90
D :	190
B :	43
r (Min) :	3.00
r1 (Max) :	1.10

Basic rated load(KN) :

Cr :	156.20
Cor :	135.20

Limiting Speed (r/min) :

Grease :	3400
Oil :	4500

Nominal mode :

Copper outer ring insulation :	7318BM/V3031A
Copper inner ring insulation :	7318BM/V3031B

Installation related dimensions (mm) :


da Max :	104.0
Da Max :	176.0
Ra Max :	2.5
Rb Max :	1.0

Approx Weight (kg) : 5.160

Insulation Performance (VDC) : >1000

SKF reference code :

Approx 1 :	7318BMVL0241
Approx 2 :	7318BMVL2071
Approx 3 :	7318BMVL0246
Approx 4 :	7318BMVL2076

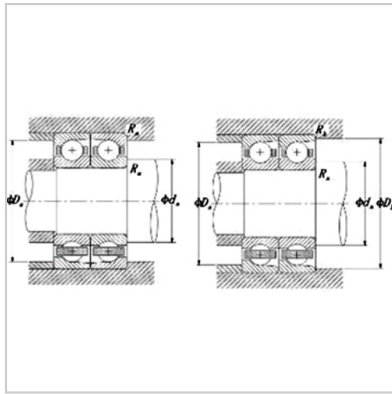

FAG reference code :

Approx 1 :	7318BM-J20AA
Approx 2 :	7318BM-J20AB
Approx 3 :	7318BM-J20A
Approx 4 :	7318BM-J20B
Approx 5 :	7318BM-J20C

: